

**For medium humidity
(25~50%RH)**

**Standard
type**


High quality

High performance

ECO

Convenient and high performance
The standard **DD series** is popular.

New Digicon and high-precision humidity sensor



Humidity inside the refrigerator
(with humidity controller)

Humidity display outside the refrigerator

By adopting a high-precision humidity sensor, it can display more accurately than a needle-type hygrometer. ($\pm 3\sim 4.5\%RH^*$)

* It is also possible to replace it with an ultra-high precision humidity sensor of ± 2 to 3% RH.

NEW

* The humidity sensor for external use is located on the upper left of the back of the body.

**For DD type, humidity can
be set from the digital
controller of the hygrometer.**

Humidity can be set easily with the push of a button.
You no longer have to open the door to change settings.
Constant humidity operation ($\pm 6\% RH$) is possible at will.
(For the AX type, the humidity can be adjusted with the dial inside the refrigerator.)

It is convenient to know the humidity
inside and outside the storage

**Analog dual
hygrometer
(With thermometer)**


Upper needle is inside humidity,
lower needle is outside humidity.



**WORLD'S
FIRST**

It is very convenient with a thermometer.

TDC-300-DD Humidity measurement example inside
Humidity setting test

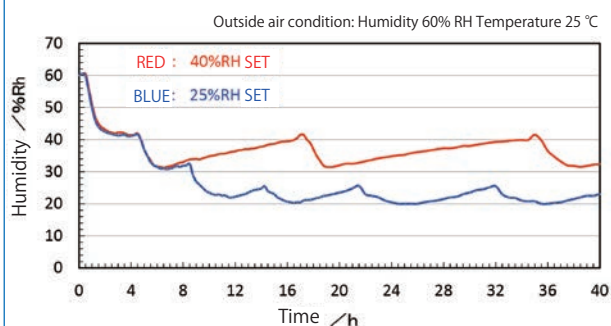

**Easy to put in because
there is no central support**

High quality and long life

**Dual humidity display inside
and outside**



TDC-510-DD TDC-510-AX
(Inside depth 650mm)

**ベスト
セラー**



TDC-300-DD TDC-300-AX
(Inside depth 390mm)



TDC-160-DD TDC-160-AX
(Inside depth 390mm)

Specifications

● In accordance with product improvement, the specifications may be altered without notice.
● Dimensions are indicated W(Width) × D(Depth) × H(Height) in mm respectively.

	TDC-510-DD / TDC-510-AX	TDC-300-DD / TDC-300-AX	TDC-160-DD / TDC-160-AX
Dehumidification / humidity control	Dry-unit • DD: Digital controller / AX: Dial automatic adjustment type		
External dimensions (m / m)	DD: 880 × 710 × 988 / AX: 880 × 730 × 988	DD: 880 × 448 × 988 / AX: 880 × 468 × 988	DD: 440 × 448 × 988 / AX: 440 × 468 × 988
Internal dimensions (m / m)	878(830) × 650 × 855(800)	878(830) × 390 × 855(800)	438(390) × 390 × 855(800)
Internal capacity	485 ℓ	291 ℓ	145 ℓ
Cabinet material	Steel, powder coating, silver metallic		
Door / Hygrometer	Steel, Glass, Magnet rubber(PCV), Analog dual hygrometer(AX), Digital dual hygrometer(DD), Lock, Handle		
Power supply	AC100V (50/60Hz)		
power consumption (AC220V)	0~10.8W (MAX360W)	0~7.2W (MAX240W)	0~3.6W (MAX120W)
Weight (Kg)	68	52	26
Accessories	3 shelves, 2 keys		

※PVC : Polyvinyl chloride

(Note) The dry cabinet does not have functions such as humidification (increasing humidity) and cooling / heating (increasing or decreasing the temperature) inside.

● Analog hygrometer accuracy: 20~80% RH $\pm 5\sim 7\% RH$ ■ MAX ○○○ W display of power consumption is only at the moment of startup.