"DRY-CABI" with reel rack

We also manufacture dry cabinets "Reel Rack Storage" according to your desired size.

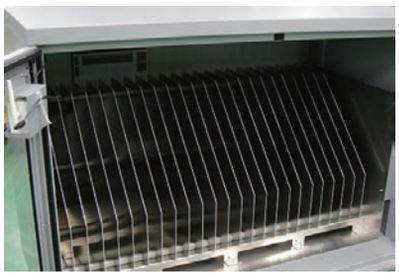

Feeder storage

DRY-CABI for feeders of each company
It is also possible to manufacture a shelf board.



Y's feeder

Production example

■ φ 600 reel rack
25 (20 kg / piece) storage
Capacity: about 700 l
600kg load capacity
Humidity 5% RH or less
Antistatic type

■ φ 700 reel rack
76 (25 kg / piece) storage
Capacity: about 2,800 l
Load capacity 2,100 kg
Humidity 5% RH or less
Antistatic type

■ φ 800 reel rack
28 (60 kg / piece) storage
Capacity: about 2,000 l
Load capacity 1,800 kg
Humidity 5% RH or less
Antistatic type

Rust prevention



Beware of maintenance and storage methods for molds and metal products!

Occurrence of rust, mold clearance, product accuracy quality It has a big impact.

Rust gradually occurs from around 40% RH, and at 65% RH rapidly Increase So-called hot and humid weather conditions with a temperature of at least 20 ° C and a humidity of at least 65% RH In this case, corrosion (rust) is very likely to occur.

DRY-CABI can meet various requests.(OPTIONS)

1. It can be manufactured in the desired special size.
2. The humidity setting conditions can be changed by making the upper and lower stages separate (separate room) type.
3. With a load bearing type, 100 to 200 kg per shelf board, a total load of 1000 kg is also possible. (For storage of molds and special raw materials)
4. It is also possible to apply conductive paint and electromagnetic shielding paint.
5. N_2Gasket N Flow meteę alarm function etc. can also be mounted.
6. Reel rack, slide type shelf board, installation of wrist strap Is possible.
7. Earthquake-resistant specification, with adjuster bolt, adjuster foot It is also possible to attach a caster, a connection bracket, and a fall prevention bracket.
8. It is also possible to manufacture stainless steel shelf boards and stainless steel bodies.