

35 years of experience and performance in moisture-proof storage. Protects optical products such as cameras and lenses, measuring instruments, electronic parts, cultural assets, guitars, musical instruments, etc.

# DRY-CABI<sup>®</sup> ACRYLIC DESICCATOR

**NEW**

## Features


2 models  
4 forms  
**NEW**

No need to replace desiccant (Semi-permanent experience)  
Maintenance unnecessary Silence, no vibration, energy saving,  
no consumables Electricity bill only 30 yen / month ...

- Equipped with a fully automatic dry unit (automatic desiccant dehumidifier)  
Automatic dial adjustment
- Capacity 100L Type 250L Type Two models
- Medium humidity type 25~50%RH DDseries  
Digital hygrometer allows you to check the inside and outside humidity at a glance
- Low humidity type 10~50%RH PDXseries  
Digital hygrometer with internal humidity, external humidity display digitally
- Ultra-low humidity type 5%RH 以下 LDXseries  
Digital hygrometer with internal humidity, external humidity display digitally
- Humidification / dehumidification type 50~75%RH AHUseries  
Adjust the humidity inside the cabinet with digital control  $\pm 3\sim 5\%$  RH

### specification

Body material : Acrylic transparent (bottom plate white) Frame : Aluminum alumite treatment  
Corner: Synthetic resin Door: with magnet packing(PVC)、With handle  
Shelf board: Stainless steel (SUS430) Load capacity 12 Kg(Per shelf board·Equal distribution  
等分布) Power supply : AC100V 50/60Hz

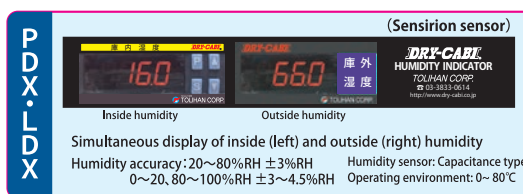

## DD TYPE Medium humidity type 25~50%RH DD Type With digital dual hygrometer, internal humidity, external humidity.

Medium humidity 25~50%RH		
Specification	AC-110-DD	AC-250-DD
External dimensions	W447 x D422 x H784mm	W553 x D525 x H1094mm
Effective dimension	W407 x D367 x H680mm	W497 x D470 x H990mm
Capacity	110 L	250 L
Number of shelf boards Size	3枚 W403 x D357mm	4枚 W494 x D460mm
Power consumption	AC100V (50/60Hz) 2.4W (Max80W)	AC100V (50/60Hz) 3.6W (Max120W)

- In accordance with product improvement, the specifications may be altered without notice.
- Dimensions are indicated W(Width)×D(Depth)×H(Height) in mm respectively.



## PDX TYPE Low humidity type 10~50%RH PDX TYPE With digital hygrometer, internal humidity, external humidity.

Low humidity 10~50%RH		
Specification	AC-110-PDX	AC-250-PDX
External dimensions	W447 x D422 x H784mm	W553 x D525 x H1094mm
Effective dimension	W407 x D367 x H680mm	W497 x D470 x H990mm
Capacity	110 L	250 L
Number of shelf boards Size	3枚 W403 x D357mm	4枚 W494 x D460mm
Power consumption	AC100V (50/60Hz) 7W (Max218W)	AC100V (50/60Hz) 14W (Max218W)

- In accordance with product improvement, the specifications may be altered without notice.
- Dimensions are indicated W(Width)×D(Depth)×H(Height) in mm respectively.

