


- With the adoption of the new Digicon (digital humidity controller) Humidity settings can now be made easily from outside the warehouse.
- Achieves high reliability and long-term stability and low humidity retention by using single or multiple advanced high performance compact dry units.
- Special desiccant in the DRY UNIT is semi-permanent.
- Energy saving design with minimal running costs and no consumables.

- Long-term continuous operation is possible with normal temperature, silence and no vibration.
- Easy-to-use full wide door (Magnet packing)。
- Because there is no center post, the left and right two doors are easy to put in and out
- Shelf load capacity 50 kg / piece (162-512 type), 100 kg / piece (932-1432 type)
- With urethane caster, adjuster (option) can be attached.
- AC (200 to 240 V) is also easy (no transformer) available (optional).

※ Anti-seismic measures: for mounting the anti-falling metal fitting (option) on the top of the top plate Install bolt and nut in 2 places on left and right

Constant humidity operation is also possible

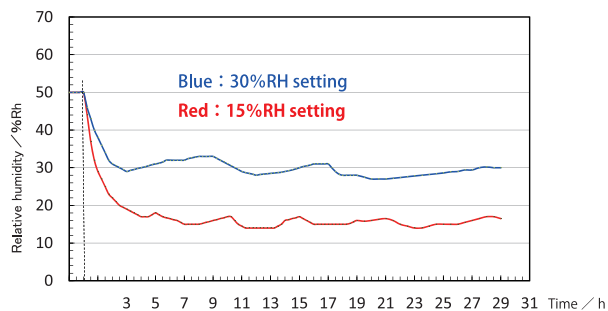

Low humidity operation ($\pm 5\%$ RH) is possible by setting the humidity.
By suppressing the lowering of humidity more than necessary, waste of power consumption can be suppressed.



TDC-932-PDX
(Inner Depth 650mm)



TDC-1332-PDX
(Inner Depth 650mm)



TDC-1432-PDX
(Inner Depth 650mm)

Specifications

● In accordance with product improvement, the specifications may be altered without notice.
● Dimensions are indicated W(Width)×D(Depth)×H(Height) in mm respectively.

	TDC-932-PDX	TDC-1332-PDX	TDC-1432-PDX
Dehumidification / humidity control	Dry-unit Digital controller		
External dimensions (m / m)	1,200 × 710 × 1,305 (Including casters)	1,200 × 710 × 1,855 (Including casters)	1,200 × 710 × 1,845 (Including casters)
Internal dimensions (m / m)	1,198(1,130) × 650 × 1,075(480 × 2)	1,198(1,130) × 650 × 1,620(480 × 3)	1,198(1,130) × 650 × 1,620(755 × 2)
Internal capacity	837 ℓ		1,261 ℓ
Cabinet material	Steel, powder coating, silver metallic		
Door / Hygrometer	Steel, Glass, Magnet rubber(PCV), Digital dual hygrometer with controller, Lock, Handle		
Power supply (AC220V) power consumption	AC100V (50/60Hz)		
Weight (Kg)	35W (MAX654W) 150	56W (MAX872W) 210	
Accessories	3 shelves, 2 keys, 4 casters (with front wheel stopper) level	5 shelves, 2 keys, 4 casters (with front wheel stopper) level	

※PVC : Polyvinyl chloride

(Note) The dry cabinet does not have functions such as humidification (increasing humidity) and cooling / heating (increasing or decreasing the temperature) inside.
● Analog hygrometer accuracy: 20~80% RH $\pm 5\sim 7\%$ RH ■ MAX ○○○ W display of power consumption is only at the moment of startup.