



# Digital Dual LED Hygrometer Special Series H-80D-MII (Capacity 76L)

## NOMENCLATURE

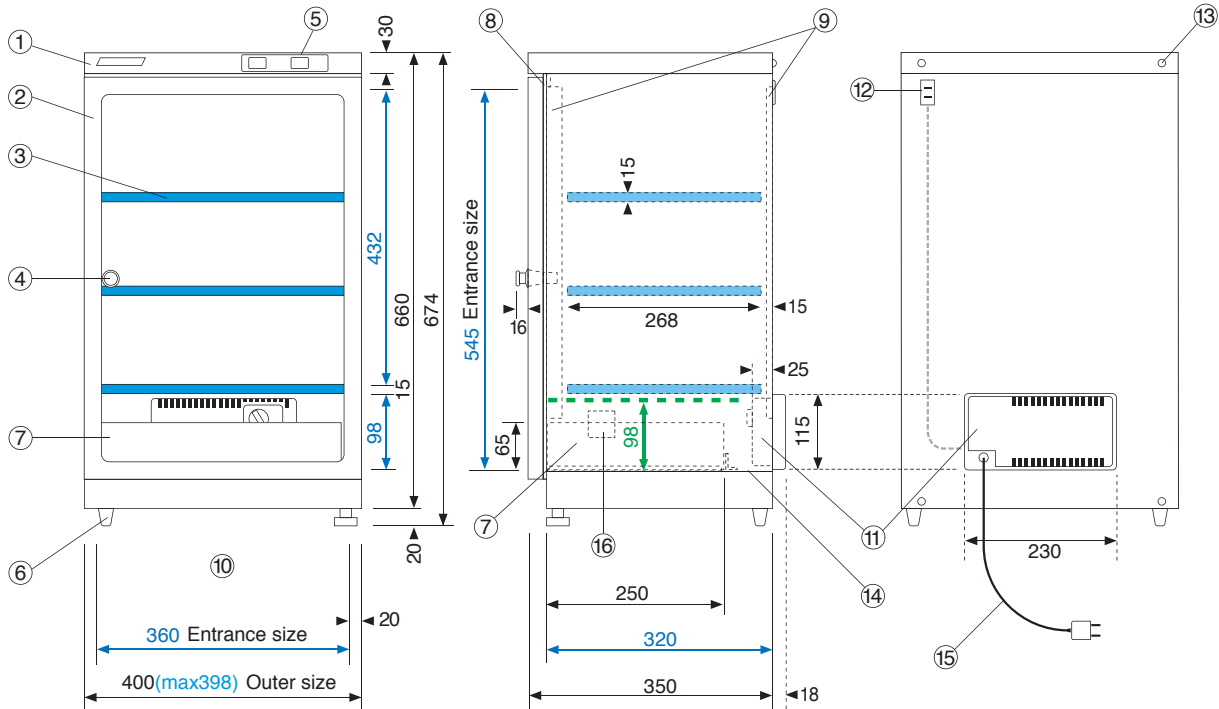

- ◆ **Blue number** indicates the dimensions of storage space.
- ◆ **Green arrow** shows the minimum position between the shelf and the bottom.  
Each shelf board is adjustable, and is removable for your convenience.

Name	Specification
① Cabinet	: High quality steel plate (0.8mm), hard coated with melamine resin (Black color).
② Door	: PVC frame, clear tempered glass with the corner of silk screen printed, magnetic packing.
③ Shelf	: 3 steel boards covered with the Photocatalytec navy blue cushion sheets.
④ Lock-Handle	: Handle with key (2pcs)
⑤ Hygrometer	: Digital Dual LED hygrometer, humidity shown both inside and outside housing
⑥ Foot	: With adjuster (front right )rubber foot.
⑦ Tray	: Steel tray is convenient as a pouch 1pc, with plastic tray for battery charging.
⑧ Door packing	: Magnet PVC edge, ensures air tightness
⑨ Pillar for hook	: For setting shelf board (4 pillars)
⑩ Controller	: Humidity controller
⑪ Dehumidifier	: Desiccant system, latest high and technological Memory alloy, IC timer, with a humidity controller for only dehumidifying.
⑫ Top outlet	: User friendly top outlet helps battery charging (Max 500W/H)
⑬ Spare screw	: Double layer connection screw, wall hung tip-resistant hook.
⑭ Bottom plate	: Steel
⑮ Power source	: AC100~120V 50/60Hz 0.3~1.82W/H AC220~240V 50/60Hz 0.15~0.91W/H The absorption & ventilation cycle of new drying unit upgraded to 4 hours (3 hours and 30 minutes absorption and 30 minutes ventilation).
⑯ Nameplate	: YES
Weight	: 12Kg



Since 1983  
**TOLIHAN CORP.**

An inquiry, the communication by E-mail.

E-mail [info@dry-cabi.co.jp](mailto:info@dry-cabi.co.jp)

21-6, Higashi-Ueno, 3-chome, Taiko-ku, Tokyo Japan 110-0015

Phone:81-3-3833-0614 Fax:81-3-3833-0616

URL <http://www.dry-cabi.co.jp/english.html>