


Dual hygrometer (Analogue)
HD-110B-MII (Capacity 106L)

NOMENCLATURE

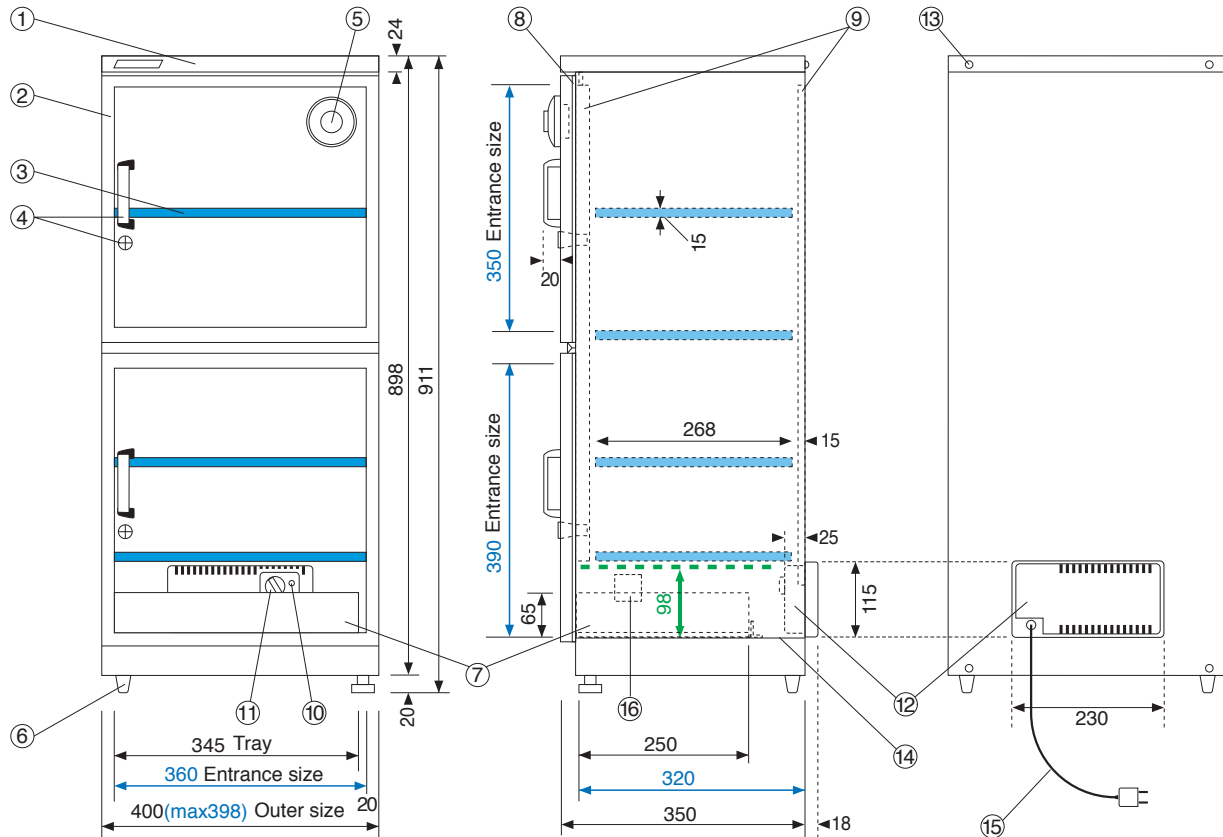

- ◆ **Blue number** indicates the dimensions of storage space.
- ◆ **Green arrow** shows the minimum position between the shelf and the bottom.
 Each shelf board is adjustable, and is removable for your convenience.

Name	Specification
① Cabinet	: High quality steel plate (0.8mm), hard coated with melamine resin (Black color).
② Door	: 2 doors, PVC flame, clear tempered glass, magnetic packing.
③ Shelf	: 4 steel boards covered with the Photocatalytic navy blue cushion sheets.
④ Lock-Handle	: 2 handles, 2 locks with key (2pcs)
⑤ Hygrometer	: Analogue Dual, humidity shown both inside (upper indicator) and outside (bottom indicator) housing
⑥ Foot	: With adjuster (front right) rubber foot.
⑦ Tray	: Steel tray is convenient as a pouch (1pc)
⑧ Door packing	: Magnet PVC edge, ensures air tightness
⑨ Pillar for hook	: For setting shelf board (4pillars)
⑩ Pilot lamp	: Lighting during the exhaust, lights out during the moisture Absorption
⑪ Controller	: Humidity controller
⑫ Dehumidifier	: Desiccant system, latest high and technological Memory alloy, IC timer, with a humidity controller for only dehumidifying.
⑬ Spare screw	: Double layer connection screw, wall hung tip-resistant hook.
⑭ Bottom plate	: Steel
⑮ Power source	: AC100~120V 50/60Hz 1.54W/H AC220~240V 50/60Hz 0.77W/H The absorption & ventilation cycle of new drying unit upgraded to 4 hours (3 hours and 30 minutes absorption and 30 minutes ventilation).
⑯ Nameplate	: YES
Weight	: 16Kg



*Note: Specification are subject to change without notice