


## Digital Dual LED Hygrometer Space-saving Shallow type

## T-83D-MII (Capacity 47L)

## **NOMENCLATURE**

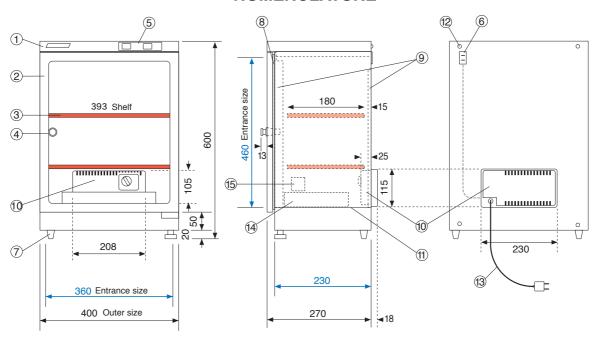

- ◆Blue number indicates the dimensions of storage space.
- ◆Each shelf board is adjustable, and is removable for your convenience.

| Name              | Specification   |
|-------------------|---|
|                   | •   |
| ① Cabinet         | : High quality steel plate (0.8mm), hard coated with melamine resin (Black color).  |
| ② Door            | <ul><li>: PVC flame, clear tempered glass with the corner of silk screen printed, magnetic packing.</li></ul>                             |
| 3 Shelf           | : 2 steel boards covered with the Photocatalytec red cushion sheets.  |
| 4 Lock-Handle     | : Handle with key (2pcs)  |
| ⑤ Hygrometer      | <ul> <li>Digital Dual LED hygrometer, humidity shown both inside and outside housing</li> </ul>   |
| 6 Top outlet      | : User friendly top outlet helps battery charging (Max 500W/H)  |
| 7 Foot            | : With adjuster (front right )rubber foot.  |
| 8 Door packing    | : Magnet PVC edge, ensures air tightness  |
| 9 Pillar for hook | : For setting shelf board (4 pillars)   |
| 1 Dehumidifier    | Desiccant system, latest high and technological Memory alloy, IC timer, with a humidity controller for only dehumidifing.                 |
| 1 Bottom plate    | : Steel   |
| Spare screw       | : Double layer connection screw, wall hung tip-resistant hook.  |
| 13 Power source   | : AC100~120V 50/60Hz 0.3~1.82W/H  |
|                   | AC220~240V 50/60Hz 0.15~0.91W/H   |
|                   | The absorption & ventilation cycle of new drying unit upgraded to 4 hours (3 hours and 30 minutes absorption and 30 minutes ventilation). |
| 4 Accessories     | ,   |
| (15) Nameplate    | : YES   |
| Weight            | : 10Kg  |





21-6, Higashi-Ueno, 3-chome, Taiko-ku, Tokyo Japan 110-0015 Phone:81-3-3833-0614 Fax:81-3-3833-0616