




## Dual hygrometer(Analogue) TDC-911-PX (Capacity 837L)

## **NOMENCLATURE**

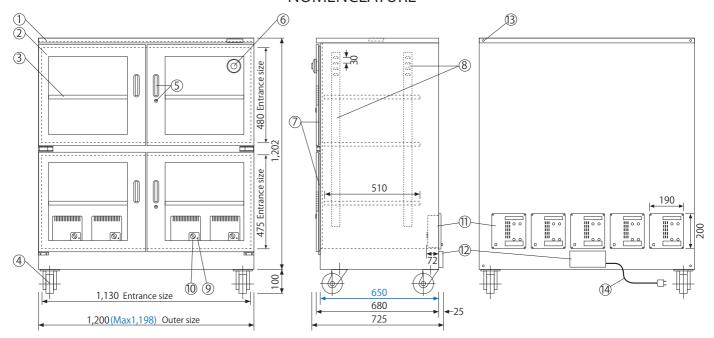

- ◆Blue number indicates the dimensions of storage space.
- ◆Each shelf board is adjustable, and is removable for your convenience.

Name	Specification
① Cabinet	: High quality steel plate (1.0mm), hard coated with melamine silver metallic resin (Silver color).
② Door	: 4 doors, steel made, with clear glass and magnetic packing.
③ Shelf	: Steel board 3pcs
4) Caster	: 4 casters, with stopper only front 2 casters
⑤ Handle	: 4 handles, 2 locks with key (2pcs)
6 Hygrometer	: Analogue Dual, humidity shown both inside (upper indicator) and outside (bottom indicator) housing
Magnet paking	g: Door packing with magnet ensures air tightness
8 Pillar for hook	: For setting shelf board
Pilot lamp	: Lighting during the exhaust, lights out during the moisture absorption
Controller	: Humidity controller
① Dry unit (5)	<ul> <li>Dehumidifier, desiccant system, latest high and technological Memory alloy, IC timer, with a humidity controller for only dehumidifing.</li> </ul>
Terminal box cove	r: Connecting cords of Dry Unit.
Spare screw	: Double layer connection screw, wall hung tip-resistant hook.
(4) Power source	: AC100~120V 50/60Hz 0~18W/H (Max 600W/moment) AC220~240V 50/60Hz 0~9W/H (Max 300W/moment) The absorption & ventilation cycle of new drying unit upgraded to 4 hours (3 hours and 30 minutes absorption and 30 minutes





ventilation).

: 87Kg

Weight